


**NEW**

逸  
品

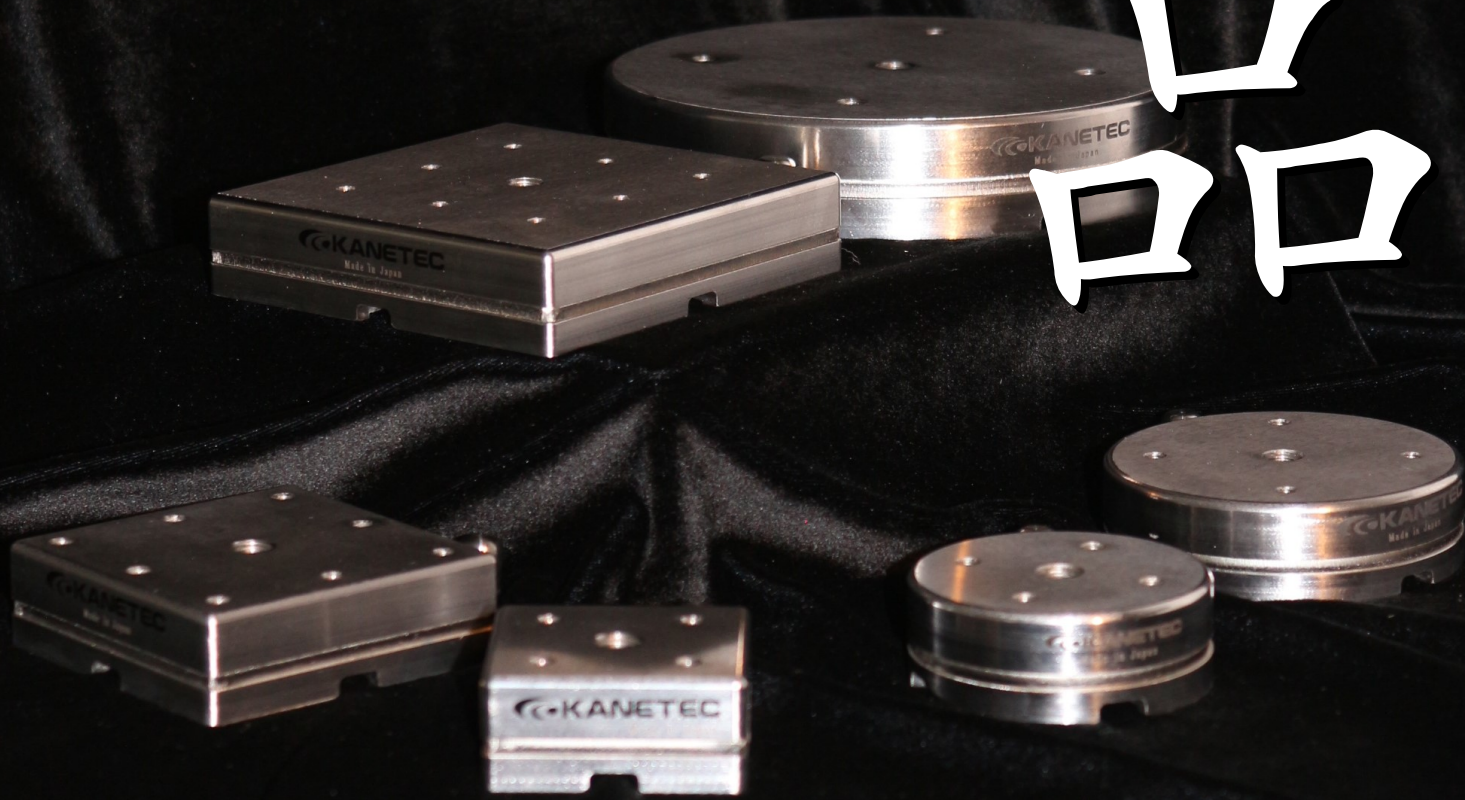


環境新時代／錆びない技術で次のステージへ

***ALL STAINLESS***

*THIN PERMANENT  
MAGNETIC HOLDER BASE*

# Rust-resistant ! Strong Holding Power !

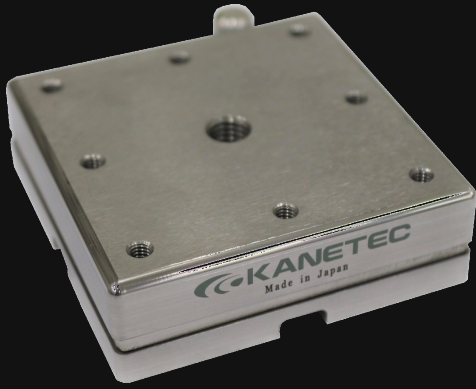

## Square type

Model	Holding Power	Dimensions (mm)			Center Tapped Hole	Peripheral Tapped Hole	Mass
		E	H	L			
MB-L-45A	120N(12kgf)	45	45	20	M8 ,depth8	4-M4,depth6(distance25)	0.3kg
MB-L-65A	300N(30kgf)	65	65			8-M4,depth6(distance25)	0.6kg
MB-L-90A	400N(40kgf)	90	90			1.2kg	

※The holding power is based on a test piece of SS400, 25 mm thick, ground surface.




## Round type

Model	Holding Power	Dimensions (mm)		Center Tapped Hole	Peripheral Tapped Hole	Mass
		A	H			
MB-L-C55A	120N(12kgf)	φ55	20	M8 ,depth8	4-M4,depth6(distance25)	0.3kg
MB-L-C70A	350N(35kgf)	φ70			4-M4,depth6(distance35)	0.6kg
MB-L-C126A	600N(60kgf)	φ126			4-M4,depth6(distance60)	2kg

※The holding power is based on a test piece of SS400, 25 mm thick, ground surface.


## Ability

The attaching surface has been changed from 2-pole to 4-pole, for stronger holding power and reduced residual magnetism.

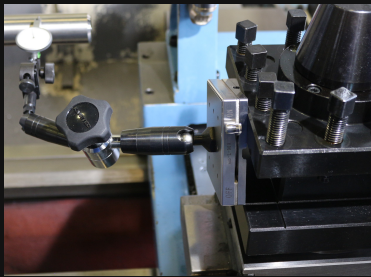


## Operability

The lever operation angle has been reduced to half of the conventional one for smooth ON-OFF switching.

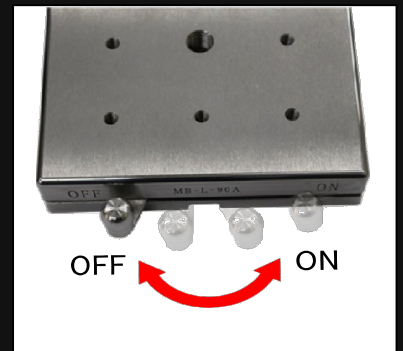

### The Square type comparison of old and new holding power

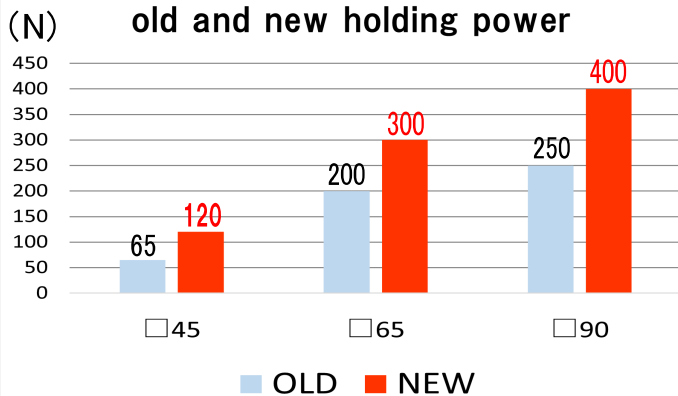

## SDGs

All stainless steel  
Rust-resistant and environmentally friendly eco-model specifications. CO2 emissions are reduced by eliminating surface treatments such as black oxide coating.



## KANETEC CO.,LTD.

INTERNATIONAL DEPARTMENT

No. 2-9, 3-chome, Iwamoto-cho, Chiyoda-ku Tokyo 101-0032 Japan

TEL : +81-3-5823-7013

FAX : +81-3-5823-7018

Home page address: <http://www.kanetec.co.jp/>

E-mail address: [kokusai\\_01@kanetec.co.jp](mailto:kokusai_01@kanetec.co.jp)

## KANETEC U.S.A. CORP.

140 W, Devon Avenue, Bensenville, IL 60106, U.S.A.

TEL: 630-860-1545, 860-2230

FAX: 630-860-9443

Home page address: <https://kanetec.com/>

E-mail address: [Kanetec@kanetec.com](mailto:Kanetec@kanetec.com)

※ The products marked by ® are the registered trademarks of Kanetec Co., Ltd. in Japan.

※ The products listed in this catalog are subject to change in models, appearance and specifications without notice.